




Ip65 Flexmond™



- 5m as the standard packing length
- Packing material is antistatic hot-sealing film bag
- 3M adhesive tape on ribbon backside
- Totally waterproof, IP65
- Standard warranty 3 years

- Cove lighting
- Architectural lights for canopy, corridor, window, archway
- Backlight or edge lighting for signage
- DIY lights for home use
- Path and contour marking
- Decorative lights for holiday, event, show, exhibition





500mm/20" Luminance(white 6500K)




Technical parameters

Model Number	Color	Length (m)	LED Q'ty	LED Type	Light Output (lumen/m)	Beam Angle (degrees)	Voltage (V DC)	Current (Amps/m)	Max.Power Consumption (W/m)	IP	Continuous Connection (m)
SC-WID20-W	White	5	600	Power SMD TOP LED	1220	120	12	1.6	19.2	65	5
SC-WID20-WW	Warm White	5	600		850	120	12	1.6	19.2	65	5
SC-WID20-NW	Natural White	5	600		1080	120	12	1.6	19.2	65	5

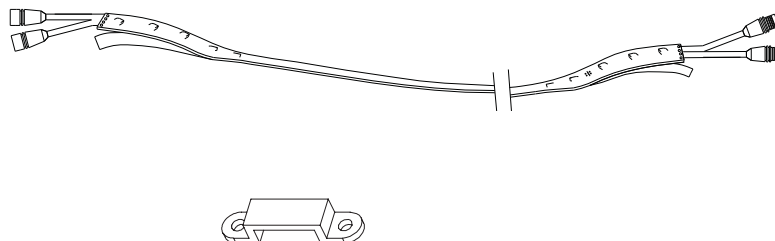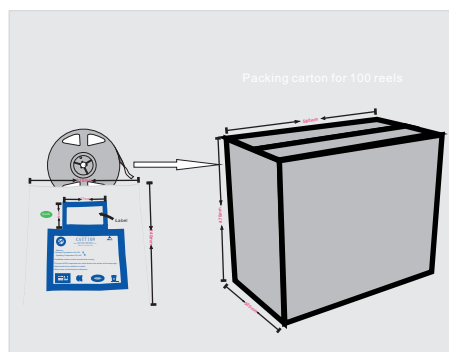

Installation

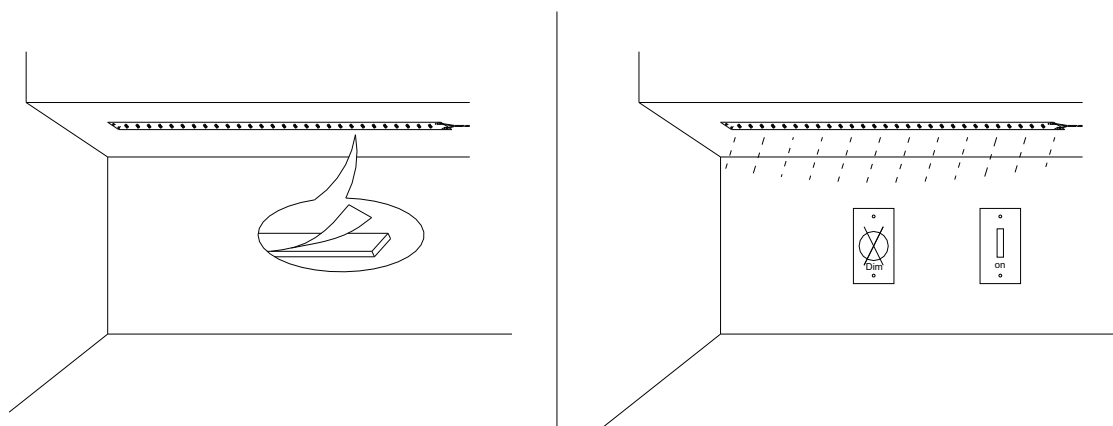

Safety Information

- The strip itself and all its components may not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- Installation of LED modules (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
- Correct electrical polarity needs to be observed. Wrong polarity may destroy the strip.
- Parallel connection is highly recommended as safe electrical operation mode.
- Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the strip.
- Please ensure that the power supply is of adapters power to operate the total load. The adaptor/power supply should be able to load 8A to run 5 meters.
- When mounting on metallic or otherwise conductive surfaces, there needs to be an electrical isolation points between strip and the mounting surface.
- Pay attention to standard ESD precautions when installing the strip.
- Damaged by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.